


room!MATE – Digital Door Signs



Product specification

- Elegant and modern true-flat design with narrow bezel for a reduced display footprint.
- Two versions for on-wall and in-wall installations.
- Solid aluminium front bezel with TSG safety glass. Front protected according to IP65.
- Power over Ethernet according to IEEE 802.3af.
- High-quality industrial MVA TFT display with 10.1" (26 cm) screen size, large viewing angle and brilliant colours. Suited for 24/7 operation.
- Comfortable and fast configuration with Internet browser.
- Select one of the three screen layouts available as factory setting for immediate operation.
- Time controlled functions to switch the display on and off, i.e over night.
- Customizable screen layouts. All elements on the screen can be arranged freely in front a bespoke background image. Color, size and font of all texts are changeable.

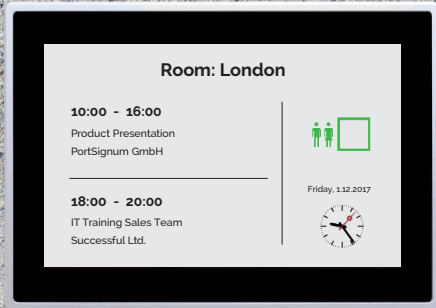

room!MATE door Sign for in-wall installation.




room!MATE door sign for on-wall installation with brushed stainless steel housing.

The door signs provided an all-embracing information about the meeting room reservations. The screen displays the room identifier, the two most current reservations of the day, a free/occupied symbol and date and time. All elements can be arranged freely on the screen in front of a bespoke background image. Use one of the included standard designs or create your own design. If you like individually for each room.




Three screen layouts are included for immediate operation:

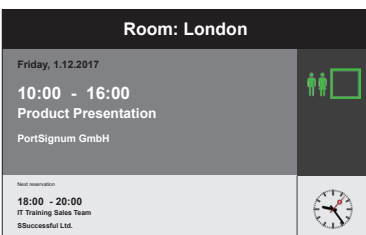

Layout 1



Layout 2

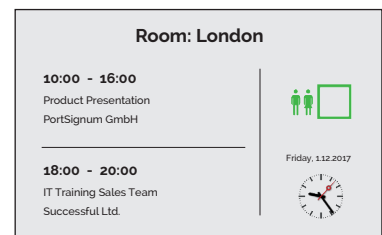

Layout 3



Product specification

Product	Model	room!MATE DoorSign101 on-wall	room!MATE DoorSign101 in-wall
	Type of installation	on-wall	in-wall
	Order number	9000001	9000002
Controller	Architecture	ARMv8	
	Type	Quad-Core Cortex-A53, 1.2 GHz	
Software	Operating System	Linux (read-only)	
	Application	Digital door signs for room!MATE room management	
	HTML5 Support	yes	
Display	Panel technology	MVA, LED Backlight	
	Screen diagonal [inch / cm]	10,1" / 26	
	Screen size [cm]	21.7 (h) x 13.6 (v)	
	Resolution [pixel]	1280 x 800	
	Aspect ratio	16 : 10	
	Brightness [cd/m ²]	300, typ.	
	Viewing angle [°]	170 horizontal / 170 vertical, typ.	
Contrast ratio	1300 : 1, typ.		
Interfaces	LAN	RJ45, 100 MBit	
Power Supply	PoE IEEE 802.3af	External PoE switch or PoE injector	
	Power consumption	<10 Watts	
Environment	Operating temperature [°C]	0 to +40	
	Operating humidity [%]	20 to 90, non condensing	
Mechanical	Front bezel	Solid aluminium, blasted	
	Housing	Stainless steel, brushed	Sheet steel, galvanized
	Safety glass	TSG, 1 mm, black passepartout	
	IP protection	Front IP65	
	Dimensions [mm]	270 x 189 [W x H]	
	Depth front bezel [mm]	8	
	Depth without front bezel [mm]	50 (with front bezel)	33 (without front bezel)
	Weight [kg]	2,0	1,6
Certification	CE	Class B	
	FCC	Class A	

Shipping content: room!MATE DoorSign101, wall mount, drilling jig, operating manual.

room!MATE DoorSign101 on-wall – dimensional drawing

Alle dimensions in [mm]

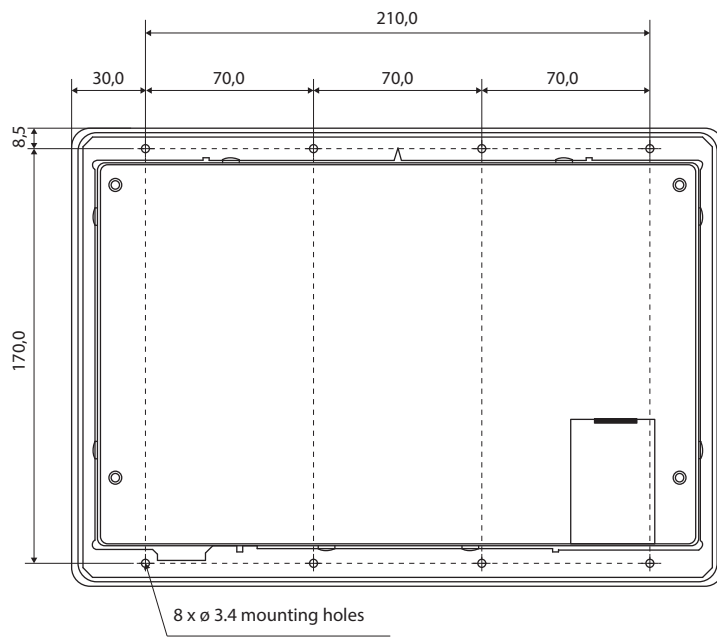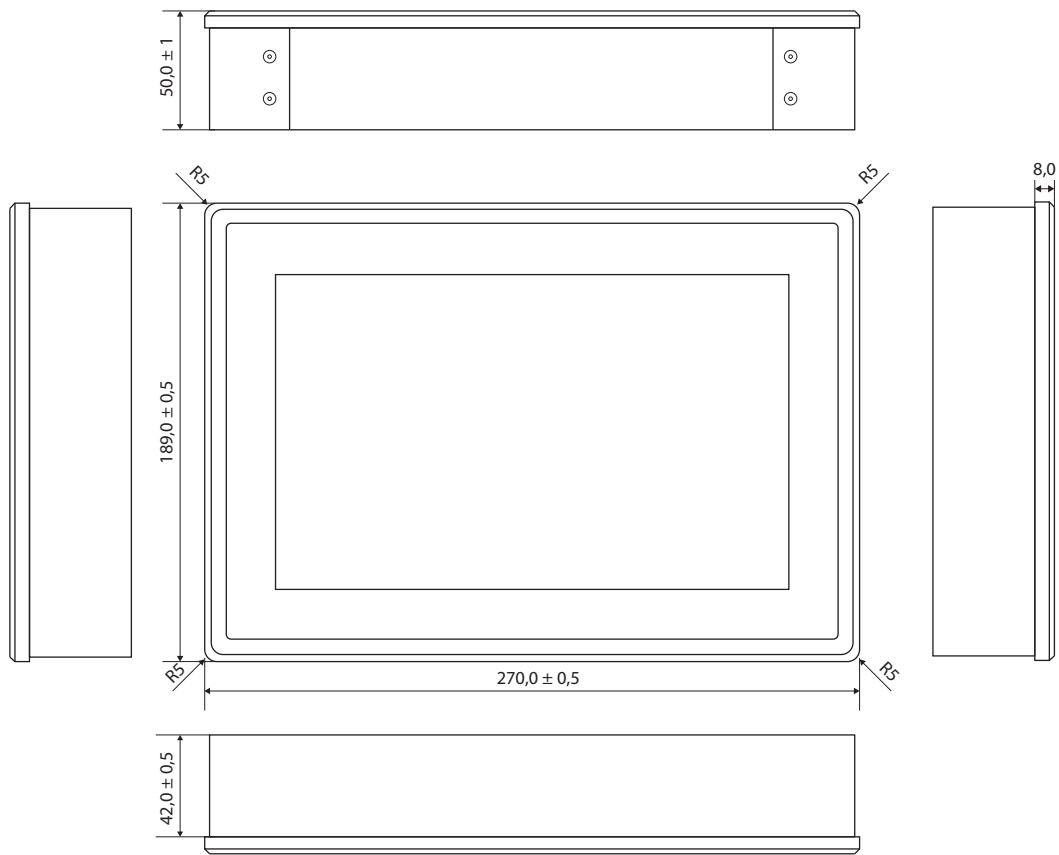

room!MATE DoorSign101 in-wall – Dimensions

Alle dimensions in [mm]

